



# SLA

FACTORY ACTIVATED

*Ready to start!*



FIND YOUR BATTERY



BUY



INSTALL



HIT THE ROAD



The new generation of SLA battery will make the user life easier. No more acid handling nor inevitable waiting for battery charge ! Everything becomes much more simple !

SLA batteries are sealed/non spillable, factory activated and maintenance free. A new environment for powersport battery : it becomes a product ready to use, extremely simple to install and carry, all at a very attractive price level.

Exist in a wide range of models.


## TECHNOLOGY

- Designed according to AGM technology (Absorbed acid)
- VRLA battery type
- Activated and pre-charged batteries

## FEATURES

- AGM construction (absorbed acid)
- VRLA battery (Valve Regulated Lead Acid)
- Wet charged factory activated (with acid in cells)
- Environmentally friendly, spillproof design
- Multi-positional fitment
- Absolutely maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Ready & Easy to use
- No acid handling - Very safe
- Increased power & Extended life
- Extreme vibration resistance

**NEW**  
TECHNOLOGY

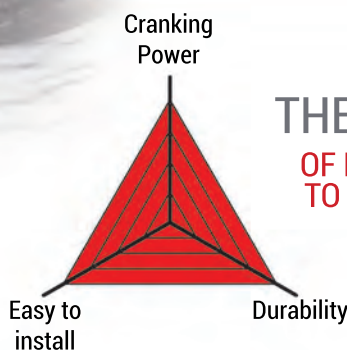

**DISCOVER**  
THE NEW GENERATION  
OF READY TO START **BATTERY**

Flash to learn more.



BS BATTERY TYPE	CAPACITY Ah (10Hr)	CCA A (-18°C)	DIMENSIONS mm (±2mm)			ASSEMBLY LAYOUT	TERMINAL
			L	W	H		
12N5.5-3B (FA)	6.5	70	135	60	130		B
12N5.5-4A (FA)	6.5	70	135	60	130		F
BB3L-B (FA)	3	30	98	56	109		B
BB4L-B (FA)	4	60	120	70	92		A
BB5L-B (FA)	5	75	120	60	130		B
BB7C-A (FA)	8	80	129	89	114		E
BB7L-B2 (FA)	8	70	136	76	130		A
BB9-B (FA)	9	120	135	75	139		A
BB10L-A2 (FA)	10	160	133	90	145		D
BB10L-B2 (FA)	10	160	133	90	145		A
BB12AL-A2 (FA)	12	140	134	80	161		B
BB14A-A2 (FA)	14	160	134	88	176		D
BB14L-A2 (FA)	14	210	135	90	167		D
BB14L-B2 (FA)	14	210	135	90	167		D
BB16AL-A2 (FA)	16	160	205	70	162		F
BB16CL-B (FA)	19	260	175	100	175		A
B50N18L-A (FA)	21	350	205	87	162		C
B50N18L-A3 (FA)	21	350	205	87	162		A
BT4B-5 (FA)	2.3	40	113	38	85		J
BTR4A-5 (FA)	2.3	45	113	48	85		I
BTX4L (FA)	3	50	113	70	85		A
BTX5L (FA)	4	70	113	70	105		A
BTX7L (FA)	6	85	113	73	130		A
BTX7A (FA)	6	90	150	87	93		A
BTX9 (FA)	8	120	150	87	105		A
BT12A (FA)	10	175	150	88	105		A
BTX12 (FA)	10	180	150	87	130		A
BTX14 (FA)	12	200	150	87	145		A
BTX14L (FA)	12	200	150	87	145		A
BTX14AH (FA)	12	210	135	90	167		A
BTX16 (FA)	14	230	150	87	161		A
BTX20CH (FA)	18	270	150	87	161		A
BTX20L (FA)	18	270	175	87	155		A
BTX20HL (FA)	18	310	175	87	155		A
BTX24HL (FA)	21	350	205	87	162		A
BIX30L (FA)	30	385	165	125	175		A
BTZ5S (FA)	4	65	113	70	85		A
BTZ6S (FA)	5	90	113	70	105		A
BTZ7S (FA)	6	130	113	70	105		A
BT7B-4 (FA)	6.5	85	150	65	93		A
BT9B-4 (FA)	8	115	150	68	105		A
BTZ10S (FA)	8.6	190	150	88	93		A
BTZ12S (FA)	11	210	150	88	110		A
BT12B-4 (FA)	10	175	150	69	130		A
BTZ14S (FA)	11.2	230	150	88	110		A
BT14B-4 (FA)	12	210	150	69	145		A
BCP18-12 (FA)	18	275	182	77	168		G

TERMINAL TYPE	A	B	C	D	E	F	G	H	I	J
3D DRAWING										

# BS Battery : A comprehensive product line

## « SLA » batteries : Mounting angles



**SLA**  
FACTORY ACTIVATED  
*Ready to start!*

